



Hybrid Flex Inverter System

Dual, Tri and Quad Zone Mix & Match Flexibility

Mini-Split Air Conditioners and Heat Pumps

AOU18RLXFZ
AOU24RLXFZ
AOU36RLXFZ

Use mini-splits just about any place that requires comfort!

Older homes • New construction homes • Schools • Places of worship
Hospitals and medical facilities • Restaurants • Computer rooms
Hotels and motels • Car washes • Convenience stores
Fast food chains • Fire houses • Police stations • Oil rigs • Bars
Sunrooms and additions • Warehouses • Nursing homes
ATM vestibules • Small offices...




Hybrid Flex Inverter System

Zoned Mix and Match Flexibility

AOU18RLXFZ, AOU24RLXFZ, AOU36FLXFZ

Contractors can select either a, 18, 24 or 36,000 BTU outdoor unit combined with wall mounted, compact cassette or slim duct type indoor units. Mix-and-match flexibility of evaporator type and capacity allows you to choose the indoor unit that best fits the application, whether it be hidden or showcased. These systems are ideal for nursing homes, doctor's offices, condominiums, apartments and residences - any place where individual cooling or heating is needed.

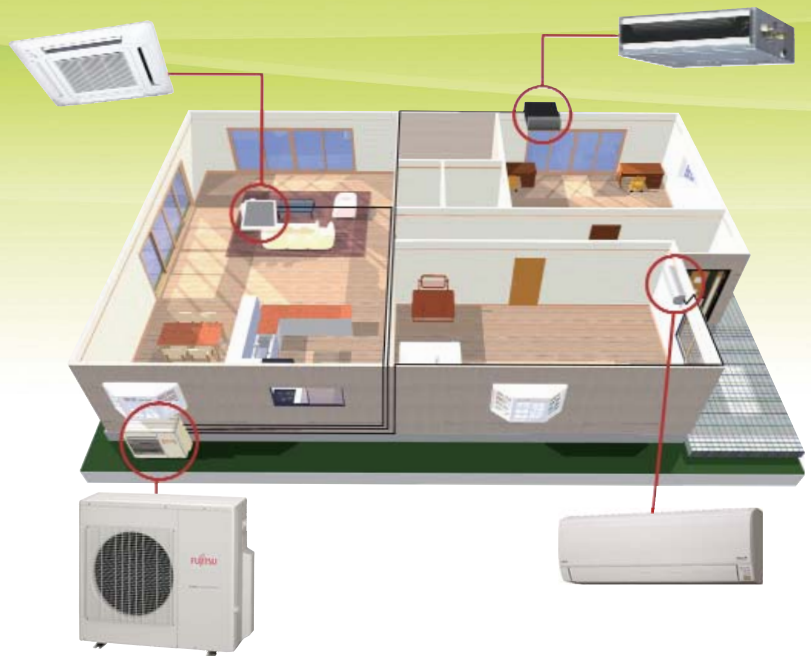

Features

- **Part of the Halcyon Hybrid Flex Inverter (HFI) Line**
As part of the HFI line of components, indoor units are compatible with other HFI outdoor units, meaning mix and match capabilities with fewer components.
- **No Branch Boxes or Separation Tube Assemblies**
While the 8-zone AOU48RLXFZ model requires both branch boxes and separation tube assembly kits, the smaller zoned units - AOU18, 24 and 36RLXFZ **do not require them.**
- **High Efficiency Systems**
Up to 18-SEER in efficiency, these units are 22% more efficient than 14-SEER competing multi-zone systems.
- **Connectable Capacity**
Our 3 outdoor units provide systems from 14,000 to 39,000 BTU. Some connectable capacity is provided to allow increased combinations and flexibility. See chart on page 3 for details. All indoor units can operate at once, however if all the evaporators are calling for cooling or heating at the same time it will decrease the capacity of each evaporator not to exceed the condenser's capacity. As zones meet desired set point the system's other evaporators increase output up to the evaporator's rated capacity.
- **A New Tri-Zone 24,000 BTU Unit**
We now have a 2-ton system that provides 3-zone flexibility. By using connectable capacity, this system allows up to three 9,000 BTU units.
- **Pricing Compared to Competition**
Additional outdoor units provides better matched BTU capacity with indoor units. By better matching the outdoor unit to the indoor capacity a better system value is achieved.
- **Why Choose an 18,000 BTU Zoned System?**
A lower BTU dual zone is often the perfect solution to a comfort need. A consumer shouldn't have to purchase a higher priced larger unit when only 14 to 18,000 BTU's are needed.

For example: The load on a 3-bedroom home with a living room and kitchen downstairs and 3 bedrooms upstairs is 39,000 BTUs (21,000 BTU downstairs and 18,000 BTU upstairs). However the family isn't upstairs and downstairs at the same time, therefore not all units will be running simultaneously allowing 100% heating or cooling to occupied spaces. This can be achieved by our AOU36RLXFZ outdoor unit.

Allowable Combinations

41 Combinations Based on BTU (Over 300 Combo's Based on Indoor Type and BTU)

AOU18RLXFZ (Dual Zone)				
Zone 1	Zone 2	Total Connectable Capacity	Total BTU	Connectable Capacity
7,000	7,000	14,000	18,000	77.8%
7,000	9,000	16,000	18,000	88.9%
9,000	9,000	18,000	18,000	100.0%
7,000	12,000	19,000	18,000	105.6%
9,000	12,000	21,000	18,000	116.7%

AOU24RLXFZ (Dual or Tri Zone)					
Zone 1	Zone 2	Zone 3	Total Connectable Capacity	Total BTU	Connectable Capacity
7,000	7,000		14,000	22,000	63.6%
7,000	9,000		16,000	22,000	72.7%
9,000	9,000		18,000	22,000	81.8%
7,000	12,000		19,000	22,000	86.4%
9,000	12,000		21,000	22,000	95.5%
7,000	7,000	7,000	21,000	22,000	95.5%
7,000	7,000	9,000	23,000	22,000	104.5%
12,000	12,000		24,000	22,000	109.1%
7,000	18,000		25,000	22,000	113.6%
7,000	9,000	9,000	25,000	22,000	113.6%
7,000	7,000	12,000	26,000	22,000	118.2%
9,000	18,000		27,000	22,000	122.7%
9,000	9,000	9,000	27,000	22,000	122.7%

Remember: These systems *do not* require branch boxes or separation tube assemblies.

AOU36RLXFZ (Dual, Tri or Quad Zone)						
Zone 1	Zone 2	Zone 3	Zone 4	Total Connectable Capacity	Total BTU	Connectable Capacity
9,000	9,000	9,000		27,000	35,200*	77.1%
7,000	9,000	12,000		28,000	35,200*	80.0%
7,000	7,000	7,000	7,000	28,000	35,200*	80.0%
9,000	9,000	12,000		30,000	35,200*	85.7%
7,000	7,000	7,000	9,000	30,000	35,200*	85.7%
7,000	12,000	12,000		31,000	35,200*	88.6%
7,000	7,000	18,000		32,000	35,200*	91.4%
7,000	7,000	9,000	9,000	32,000	35,200*	91.4%
9,000	12,000	12,000		33,000	35,200*	94.3%
7,000	7,000	7,000	12,000	33,000	35,200*	94.3%
7,000	9,000	18,000		34,000	35,200*	97.1%
7,000	9,000	9,000	9,000	34,000	35,200*	97.1%
7,000	7,000	9,000	12,000	35,000	35,200*	100.0%
18,000	18,000+			36,000	33,000+	102.9%
9,000	9,000	18,000		36,000	35,200*	102.9%
12,000	12,000	12,000		36,000	35,200*	102.9%
9,000	9,000	9,000	9,000	36,000	35,200*	102.9%
7,000	12,000	18,000		37,000	35,200*	105.7%
7,000	9,000	9,000	12,000	37,000	35,200*	105.7%
7,000	7,000	24,000		38,000	35,200*	108.6%
7,000	7,000	12,000	12,000	38,000	35,200*	108.6%
7,000	7,000	7,000	18,000**	39,000	35,200*	111.4%
9,000	12,000	18,000		39,000	35,200*	111.4%



AOU18RLXFZ
AOU24RLXFZ
AOU36RLXFZ



ASU7RLF, ASU9RLF,
ASU12RLF, ASU18RLF,
ASU24RLF



ARU9RLF, ARU12RLF,
ARU18RLF, ARU24RLF



AAU9RLF, AAU12RLF,
AAU18RLF

* Capacity based on non-ducted models. For ducted or mixed refer to capacity table on Page 4.

**ARU18RLF and AAU18RLF only. Wall mounted ASU18RLF cannot be connected in this combination. See Design & Technical Manual for capacities.

+ If AOU18RLXFZ is paired with two 18,000 BTU indoor units, you have to purchase optional kit Part #K9FZ1818.

Capacity based on non-ducted models. For ducted or mixed refer to capacity table in Design & Technical Manual.

Outdoor Units 18, 24 and 36,000 BTUs


AOU18RLXFZ, AOU24RLXFZ, AOU36RLXFZ



AOU18, 24RLXFZ AOU36RLXFZ


Compact Size

The compact size of the outdoor units allows for many installation opportunities.

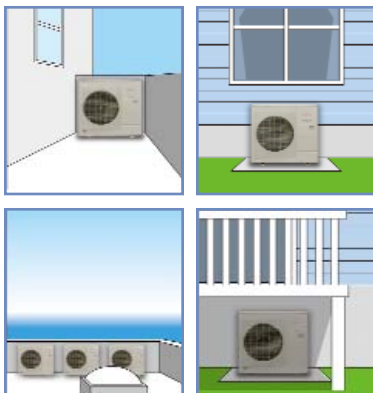

DC Twin Rotary Compressor

A high performance, low noise, large capacity DC twin rotary compressor is used.



Connectable Indoor Unit <i>Number</i>	2 indoor units	2 to 3 indoor units	2 ¹ to 4 indoor units
Connectable Indoor Unit <i>Capacity</i>	14 to 21,000 BTU ²	14 to 27,000 BTU ²	27 to 39,000 BTU ²
Clg. Operating Range °F(°C)	14 to 115 (-10 to 46)	14 to 115 (-10 to 46)	32 to 115 (0 to 46)
Htg. Operating Range °F(°C)	5 to 75 (-15 to 24)	5 to 75 (-15 to 24)	14 to 75 (-10 to 24)
Input Power: Cooling Rated kW*	1.44	1.76	4.00
Input Power: Heating Rated kW*	1.87	1.73	3.00
Voltage/Frequency/Phase	208-230/60/1	208-230/60/1	208-230/60/1
Current: Clg Outdoor Max. (A)	6.3	7.7	17.5
Current: Htg Outdoor Max. (A)	8.2	7.6	13.1
Recommended Fuse Size (A)	25	25	30
Outdoor Fan Airflow <i>CFM (Clg/Htg)</i>	1,795/1,619	1,942/1,942	2,119/2,237
Fan: Type x Quantity	Propeller x 1	Propeller x 1	Propeller x 1
Sound Pressure Level Cooling <i>dB(A)</i>	49	51	53
Sound Pressure Level Heating <i>dB(A)</i>	49	52	55
Max. Pipe Length Total <i>Ft (m)</i>	164 (50)	164 (50)	230 (70)
Max. Length Each <i>Ft (m)</i>	82 (25)	82 (25)	82 (25)
Max. Pipe Height Difference Between Indoor Units <i>Ft (m)</i>	32 (10)	32 (10)	32 (10)
Max. Pipe Height Difference Between Outdoor Unit & Farthest Indoor <i>Ft (m)</i>	49 (15)	49 (15)	49 (15)
Connection Method	Flare	Flare	Flare
Conn. Pipe Diameter <i>Inch</i>	Liq. 1/4 x 2 Suc. 3/8 x 2	Liq. 1/4 x 3 Suc. 1/2 x 1, 3/8 x 2	Liq. 1/4 x 4 Suc. 1/2 x 1, 3/8 x 3
Net Weight <i>lbs. (kg)</i>	119 (54)	124 (56)	149 (68)
Dimensions: Height <i>Inch</i>	27-9/16	27-9/16	32-11/16
<i>mm</i>	700	700	830
Width <i>Inch</i>	35-7/16	35-7/16	35-7/16
<i>mm</i>	900	900	900
Depth <i>Inch</i>	13	13	13
<i>mm</i>	330	330	330
Refrigerant	R410A	R410A	R410A

AOU18RLXFZ Heat Pump	AOU24RLXFZ Heat Pump	AOU36RLXFZ Heat Pump
2 indoor units	2 to 3 indoor units	2 ¹ to 4 indoor units
14 to 21,000 BTU ²	14 to 27,000 BTU ²	27 to 39,000 BTU ²
14 to 115 (-10 to 46)	14 to 115 (-10 to 46)	32 to 115 (0 to 46)
5 to 75 (-15 to 24)	5 to 75 (-15 to 24)	14 to 75 (-10 to 24)
1.44	1.76	4.00
1.87	1.73	3.00
208-230/60/1	208-230/60/1	208-230/60/1
6.3	7.7	17.5
8.2	7.6	13.1
25	25	30
1,795/1,619	1,942/1,942	2,119/2,237
Propeller x 1	Propeller x 1	Propeller x 1
49	51	53
49	52	55
164 (50)	164 (50)	230 (70)
82 (25)	82 (25)	82 (25)
32 (10)	32 (10)	32 (10)
49 (15)	49 (15)	49 (15)
Flare	Flare	Flare
Liq. 1/4 x 2 Suc. 3/8 x 2	Liq. 1/4 x 3 Suc. 1/2 x 1, 3/8 x 2	Liq. 1/4 x 4 Suc. 1/2 x 1, 3/8 x 3
119 (54)	124 (56)	149 (68)
27-9/16	27-9/16	32-11/16
700	700	830
35-7/16	35-7/16	35-7/16
900	900	900
13	13	13
330	330	330
R410A	R410A	R410A

¹18+18 is the only 2 indoor unit combination and requires K9FZ1818.

²See table on page 3 for allowed combinations within this connectable capacity range.

Nominal Capacities, SEER and HSPF Ratings

Data below is based on AHRI 210/240 non-ducted wall mounted models

Model	Indoor Unit		Cooling Capacity Btu/h	EER	SEER	Heating Capacity Btu/h		COP	HSPF
	Type	Combination				95°F	47°F		
AOU18RLXFZ	Non-Ducted	9+9	18,000	12.50	18.0	22,000	13,900	3.44	9.3
	Ducted	9+9	18,000	12.10	16.0	22,000	13,900	3.52	9.0
	Mixed	-	18,000	12.30	17.0	22,000	13,900	3.48	9.2
AOU24RLXFZ	Non-Ducted	9+7+7	22,000	12.50	18.0	24,000	14,100	4.04	9.5
	Ducted	12+12	22,000	10.60	15.5	24,000	14,100	3.42	9.0
	Mixed	-	22,000	11.55	16.8	24,000	14,100	3.74	9.3
AOU36RLXFZ	Non-Ducted	9+9+9+9	35,200	8.80	16.0	36,400	22,000	3.56	9.4
	Ducted	9+9+9+9	33,800	8.10	14.5	36,400	21,200	3.08	8.7
	Mixed	-	34,400	8.45	15.3	36,400	21,600	3.32	9.1

Yellow rows represent models that are ENERGY STAR® Qualified. Only these specific combinations qualify for the Federal Tax Credit of \$300 in 2011.



Wall Mounted 7, 9, 12, 18 and 24,000 BTUs

ASU7RLF, ASU9RLF, ASU12RLF, ASU18RLF, ASU24RLF



ASU7, 9, 12RLF



ASU18, 24RLF

Built In Filtration



Long-life+ Ion Deodorization Filter
The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic.



Apple-Catechin Filter
Dust, mold spores and microorganisms are absorbed onto the filter by static electricity and growth is inhibited and deactivated.

Easy Maintenance

Front panel is easily removed for cleaning.



Standard Features

- Apple Catechin Filter
- Ion Deodorizing Filter
- Sleep Timer
- 24-Hour Timer
- Dry Mode
- Auto Louver: 4-Way*
- Auto Mode
- Minimum Heat Mode
- Quiet Mode
- Auto Restart/Reset
- Auto Changeover
- Power Diffuser*

	ASU7RLF	ASU9RLF	ASU12RLF	ASU18RLF	ASU24RLF
	Heat Pump	Heat Pump	Heat Pump	Heat Pump	Heat Pump
Nominal Cooling BTU/h*	7,000	9,000	12,000	18,000	24,000
Nominal Heating BTU/h*	8,100	10,200	13,500	20,000	27,000
Voltage/Frequency/Phase	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Air Circ. C.F.M. (m ³ /h): Hi	Clg 330 (560) Htg 330 (560)	Clg 353 (600) Htg 353 (600)	Clg 388 (660) Htg 388 (660)	Clg 542 (920) Htg 542 (920)	Clg 659 (1,120) Htg 659 (1,120)
Medium	Clg 294 (500) Htg 294 (500)	Clg 306 (520) Htg 306 (520)	Clg 330 (560) Htg 330 (560)	Clg 436 (740) Htg 436 (740)	Clg 530 (900) Htg 530 (900)
Low	Clg 253 (430) Htg 253 (430)	Clg 253 (430) Htg 253 (430)	Clg 265 (450) Htg 277 (470)	Clg 365 (620) Htg 365 (620)	Clg 436 (740) Htg 436 (740)
Quiet	Clg 200 (340) Htg 206 (350)	Clg 200 (340) Htg 206 (350)	Clg 200 (340) Htg 206 (350)	Clg 324 (550) Htg 324 (550)	Clg 365 (620) Htg 365 (620)
Noise Level dB(A) (Clg/Htg): Hi	36/36	37/37	40/40	43/44	49/48
Medium	32/32	33/33	36/36	37/37	42/42
Low	29/29	29/29	30/31	33/33	37/37
Quiet	25/25	25/25	25/25	31/31	33/33
Running Current Rated (A): Cooling	0.13	0.15	0.19	0.32	0.53
Heating	0.13	0.15	0.19	0.32	0.53
Power Use Rated (w): Cooling	15	17	22	41	69
Heating	15	17	22	41	69
Fan Speeds Stage	4+auto	4+auto	4+auto	4+auto	4+auto
Air Direction: Horizontal	Manual	Manual	Manual	Auto	Auto
Vertical	Auto	Auto	Auto	Auto	Auto
Primary Air Filter	Washable	Washable	Washable	Washable	Washable
Ion Deodorizing Filter	Disposable	Disposable	Disposable	Disposable	Disposable
Apple-Catechin Filter	Disposable	Disposable	Disposable	Disposable	Disposable
Connection Method	Flare	Flare	Flare	Flare	Flare
Conn. Pipe Diameter Inch	suc 3/8 dis 1/4	suc 3/8 dis 1/4	suc 3/8 dis 1/4	suc 1/2 dis 1/4	suc 5/8 dis 1/4
Net Weight lbs. (kg)	18 (8)	18 (8)	18 (8)	31 (14)	31 (14)
Dimensions: Height Inch (mm)	11-1/16 (280)	11-1/16 (280)	11-1/16 (280)	12-5/8 (320)	12-5/8 (320)
Width Inch (mm)	31-1/16 (790)	31-1/16 (790)	31-1/16 (790)	39-1/4 (998)	39-1/4 (998)
Depth Inch (mm)	8 (203)	8 (203)	8 (203)	9 (228)	9 (228)
Refrigerant	R410A	R410A	R410A	R410A	R410A

*These are based on 100% capacity and AHRI conditions.

+ The filter can be used for approximately 3 years if it is washed with water when dirty to restore its surface action.

*Feature of models ASU18, 24RLF only.

Slim Duct 9, 12, 18 and 24,000 BTUs

ARU9RLF, ARU12RLF, ARU18RLF, ARU24RLF



ARU9, 12RLF

ARU18RLF


ARU24RLF

	ARU9RLF Heat Pump	ARU12RLF Heat Pump	ARU18RLF Heat Pump	ARU24RLF Heat Pump
Nominal Cooling <i>BTU/h</i>	9,000	12,000	18,000	24,000
Nominal Heating <i>BTU/h</i>	10,200	13,500	20,000	27,000
Voltage/Frequency/Phase	208-230/60/1	208-230/60/1	208-230/60/1	208-230/60/1
Recommended Static Pressure <i>In. W. C.</i>	0 ~ 0.36	0 ~ 0.36	0 ~ 0.36	0 ~ 0.20
Air Circ. <i>C.F.M. (m³/h) Clg/Htg: Hi</i>	353 (600)	383 (650)	554 (940)	783 (1,330)
Medium	324 (550)	353 (600)	518 (880)	730 (1,240)
Low	294 (500)	324 (550)	483 (820)	648 (1,100)
Quiet	265 (450)	283 (480)	442 (750)	607 (1,030)
Noise Level <i>dB(A) (Clg/Htg): Hi</i>	28/28	29/29	32/33	33/35
Medium	27/26	28/28	31/32	32/34
Low	26/25	27/27	30/31	30/32
Quiet	25/24	26/24	29/29	29/29
Running Current <i>Rated (A): Cooling</i>	0.30	0.35	0.44	0.66
Heating	0.30	0.35	0.44	0.66
Power Use <i>Rated (W): Cooling</i>	49	58	73	111
Heating	49	58	73	111
Fan Speeds <i>Stage</i>	4 + Auto	4 + Auto	4 + Auto	4 + Auto
Air Filter	Washable	Washable	Washable	Washable
Connection Method	Flare	Flare	Flare	Flare
Conn. Pipe Diameter <i>Inch</i>	suc 3/8 dis 1/4	suc 3/8 dis 1/4	suc 1/2 dis 1/4	suc 5/8 dis 1/4
Net Weight <i>lbs. (kg)</i>	41 (19)	41 (19)	50 (23)	59 (27)
Dimensions: Height <i>Inch (mm)</i>	7-25/32 (198)	7-25/32 (198)	7-25/32 (198)	7-25/32 (198)
Width <i>Inch (mm)</i>	27-9/16 (700)	27-9/16 (700)	35-7/16 (900)	43-5/16 (1,100)
Depth <i>Inch (mm)</i>	24-13/32 (620)	24-13/32 (620)	24-13/32 (620)	24-13/32 (620)
Supply Duct Flange	5-15/16 (151)	5-15/16 (151)	5-15/16 (151)	5-15/16 (151)
Dimensions: Height <i>Inch (mm)</i>				
Width <i>Inch (mm)</i>	25-19/32 (650)	25-19/32 (650)	33-15/32 (850)	41-11/32 (1,050)
Depth <i>Inch (mm)</i>	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)
Return Duct Flange	6-27/32 (174)	6-27/32 (174)	6-27/32 (174)	6-27/32 (174)
Dimensions: Height <i>Inch (mm)</i>				
Width <i>Inch (mm)</i>	22-19/32 (574)	22-19/32 (574)	30-15/32 (774)	38-11/32 (974)
Depth <i>Inch (mm)</i>	3/4 (19) (Flat)	3/4 (19) (Flat)	3/4 (19) (Flat)	3/4 (19) (Flat)
Refrigerant	R410A	R410A	R410A	R410A

Slim Duct

Adaptable when ceiling cavity is small and there is no slope for drain.

Traditional

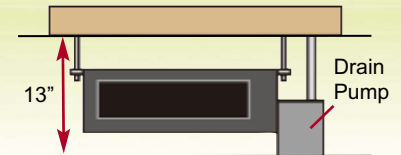


Slim Duct



Return Air-intake

Air intake direction can be selected to match the installation site.



Standard Features

- Dry Mode
- Weekly Timer
- Sleep Timer*
- 24-Hour Timer*
- Minimum Heat Mode*
- Auto Mode
- Quiet Mode
- Auto Restart/Reset
- Auto Changeover
- Condensate Pump
- Fresh Air Intake

*Available only with optional wireless remote control.




Compact Cassettes 9, 12, and 18,000 BTUs

AUU9RLF, AUU12RLF, AUU18RLF

Easy Installation


Fits into a standard ceiling tile*.
Compact cassette and slim duct models can be networked.

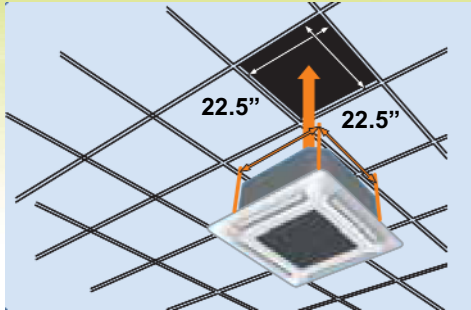

*Dimensions of outer grille are 27-9/16" x 27-9/16" and may overlap adjacent tiles.

2-Stage Turbo Fan

Air distribution is evenly spread across the heat exchanger by the new 2 stage turbo fan which produces two separate airflow streams.

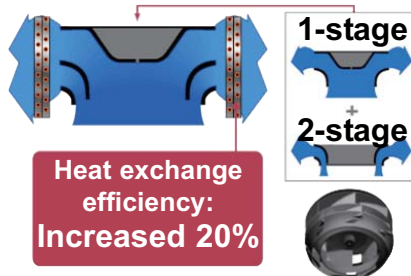

Standard Features

- Sleep Timer
- Dry Mode
- Auto Louver: Up/ Down
- Quiet Mode
- Auto Restart/Reset
- Auto Changeover
- Remote Temperature Sensor
- High Ceiling Mode
- Condensate Pump
- 2-Stage Turbo Fan
- Minimum Heat Mode+
- Fresh Air Intake**



+ Available only with optional wireless remote control.

**Requires Fujitsu's Optional Fresh Air Kit part #UTZ-VXAA. Allows for a 4 – inch flex duct connection and a field supplied duct booster fan. Fresh air maximum is 10% of unit High fan CFM. See UTZ-VXAA Design and Technical Manual for fan static pressure requirements at Fresh Air Kit. Add hood, filter and duct losses for fan total static pressure requirements. Will add 4" to the height of the indoor unit.

* Compact Cassette Grille UTG-CCGF sold separately. Must order one with each compact cassette.

	AUU9RLF Heat Pump	AUU12RLF Heat Pump	AUU18RLF Heat Pump
Nominal Cooling BTU/h	9,000	12,000	18,000
Nominal Heating BTU/h	10,200	13,500	20,000
Voltage/Frequency/Phase	208-230/60/1	208-230/60/1	208-230/60/1
Air Circ. C.F.M. (m ³ /h): Hi	318 (540) Clg or Htg	359 (610) Clg or Htg	441 (750) Clg 471 (800) Htg
Medium	288 (490) Clg or Htg	312 (530) Clg or Htg	359 (610) Clg 418 (710) Htg
Low	259 (440) Clg or Htg	277 (470) Clg or Htg	306 (520) Clg 353 (600) Htg
Quiet	230 (390) Clg or Htg	241 (410) Clg or Htg	241 (410) Clg 265 (450) Htg
Noise Level dB(A) Clg/Htg: Hi	33/34	37/37	42/44
Medium	31/32	33/33	37/40
Low	29/29	31/31	33/37
Quiet	27/27	28/28	29/30
Running Current Rated (A): Cooling	0.15	0.19	0.30
Heating	0.15	0.19	0.30
Power Use Rated/Max (W): Clg	18	23	39
Heating	18	23	39
Fan Speeds Stage	4+auto	4+auto	4+auto
Air Direction: Vertical	Automatic	Automatic	Automatic
Air Filter	Washable	Washable	Washable
Front Grille	UTG-CCGF*	UTG-CCGF*	UTG-CCGF*
Connection Method	Flare	Flare	Flare
Conn. Pipe Diameter Inch	suc 3/8 dis 1/4	suc 3/8 dis 1/4	suc 1/2 dis 1/4
Net Weight lbs. (kg)	33 (15)	33 (15)	33 (15)
Chassis Dim: Height Inch (mm)	9-11/16 (245)	9-11/16 (245)	9-11/16 (245)
Width Inch (mm)	22-7/16 (570)	22-7/16 (570)	22-7/16 (570)
Depth Inch (mm)	22-7/16 (570)	22-7/16 (570)	22-7/16 (570)
Grille Dim: Height Inch (mm)	1-15/16 (49)	1-15/16 (49)	1-15/16 (49)
Width Inch (mm)	27-9/16 (700)	27-9/16 (700)	27-9/16 (700)
Depth Inch (mm)	27-9/16 (700)	27-9/16 (700)	27-9/16 (700)
Refrigerant	R410A	R410A	R410A



Fresh Air Kit** UTZ-VXAA

mixes room air then passes through the heat exchanger.

Optional Accessories

Simple Remote Control*

#UTY-RSNUM

Suitable when only basic operations are required for hotels, offices and other places where there is frequent arrival and departure of occupants. To be used with all HFI indoor models.



Wireless Remote Controller


#UTY-LNHUM

For spaces where there is just no place to mount the wired remote. For use only with HFI compact cassettes.



Air Outlet Shutter Plate for Compact Cassettes #UTR-YDZB

In a 3-way air flow configuration an Air Outlet Shutter Plate kit is required.



Communication Kit

#UTY-XCBXZ1

Required to connect ASU7RLF, 9RLF and 12RLF to Wired Remote # UTY-RNNUM, Dry Contact Wire Kit # UTY-XWZX, and Simple Remote Control # UTY-RSNUM.

Wired Remote Control for Wall Mounts*

#UTY-RNNUM

The wired remote controller with its unique lock function and sleek design provides full feature access to property managers, building owners, and facility maintenance, as well as providing basic comfort features to tenants, employees, and teachers. Requires interface kit UTY-XCBXZ1.



Receiver Unit

#UTY-LRHUM

Includes a wireless remote control. For use on slim duct Halcyon HFI indoor units.



Dry Contact Wire Kit*

#UTY-XWZX

Turns system on or off using a normally closed circuit, for example in home automation or BMS integration of only On/Off operation, occupancy sensor or key card switch or lead-lag control of other heating/cooling.



Field Supplied Filters Used With Slim Duct Units

Slim Duct Units require field supplied filters. They can be installed at the unit or for more convenient servicing, in filter grilles. The chart to the right provides guidelines for determining filter sizes.

The chart includes CFM, external static pressure capability and a typical filter size for each model. Filters are sized to keep velocities and static pressure loss low. This will insure sufficient static pressure is available for ductwork, fittings and supply and return grilles. Alternative filter sizes with equivalent face areas can be used. After deducting filter loss, available static pressure values are shown.



A fiberglass filter is shown in blue to the left. A MERV pleated filter is shown in white.

	ARU 9RLF	ARU 12RLF	ARU 18RLF	ARU 24RLF
CFM	353	353	547	806
Typical Filter Size	12 x 20	12 x 20	14 x 25	18 x 30
Velocity, FPM	212	212	225	215
Unit External SP, in. W.C.	0.36	0.36	0.36	0.20
1" Fiberglass Filter				
SP Loss, in. W.C.	0.04	0.04	0.04	0.04
Available Static Pressure	0.32	0.32	0.32	0.16
1" MERV 8 Pleated Filter				
SP Loss, in. W.C.	0.12	0.12	0.14	0.13
Available Static Pressure	0.24	0.24	0.22	0.07
2" MERV 8 Pleated Filter				
SP Loss, in. W.C.	0.07	0.07	0.08	0.07
Available Static Pressure	0.29	0.29	0.28	0.13



The Fujitsu logo is a registered trademark of Fujitsu Limited. The Halcyon HFI logo and name is a trademark of Fujitsu General America, Inc. Copyright © 2011 Fujitsu General America, Inc. Fujitsu's products are subject to continuous improvements. Fujitsu reserves the right to modify product design, specifications and information in this brochure without notice and without incurring any obligations.

PLEASE NOTE: Internet sales are strictly prohibited and unauthorized. Any HVAC systems purchased on the Internet, from an online retailer or any similar e-tailing website, OR where the original factory serial numbers of the display have been removed, defaced, or replaced in any way WILL NOT BE COVERED BY WARRANTY.

Fujitsu General America, Inc.

353 Route 46 West
Fairfield, NJ 07004
Toll Free: (888) 888-3424
Local: (973) 575-0380
Fax: (973) 836-0447
Email: hvac@fujitsugeneral.com
www.fujitsugeneral.com

